




The Right Connection™

Dry Quick-Disconnect Couplings



Flow Rate

Media: Water Temp: 60° F

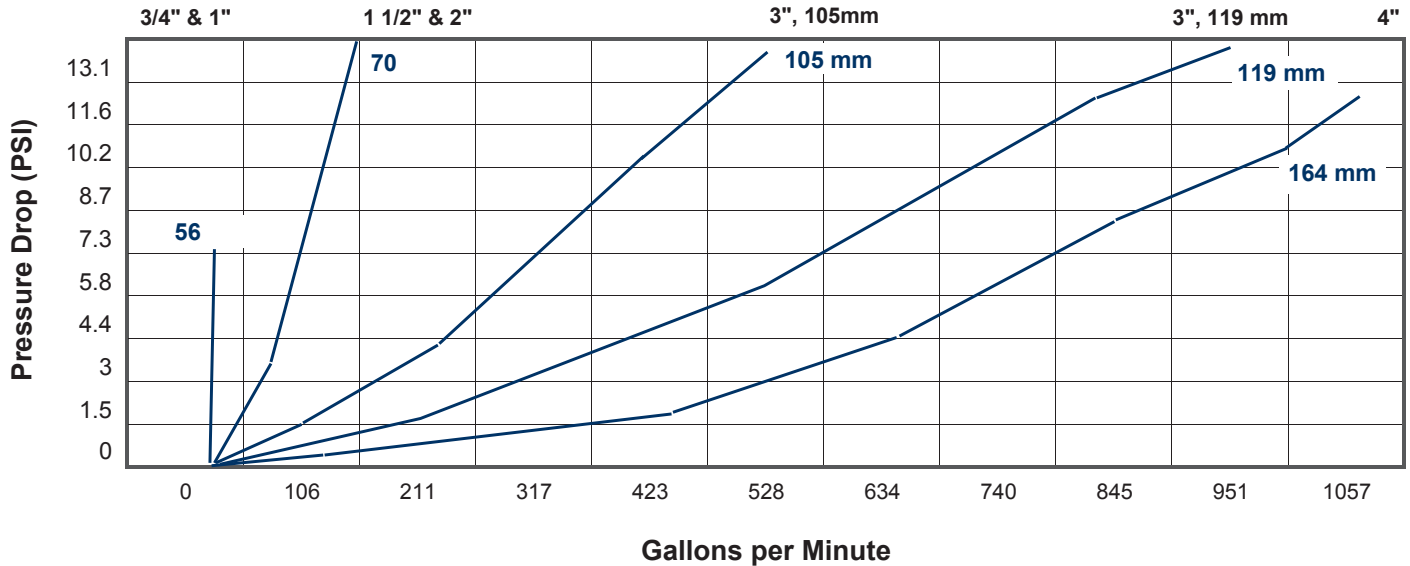

Spillage on Disconnection

The test was made by coupling and uncoupling 10 times under pressures between one (1) and ten (10) bars. The result we got is a total spillage over 10 coupling cycles and an average spillage on each coupling cycle. The test was carried out with water under ambient temperature.

Size	Socket diameter	Total spill 10 cycles	Average spill 1 cycle
1" – DN 25	56 mm	1 ml	0,1 ml
2" – DN 50	70 mm	3 ml	0,3 ml
2½" – DN 65	105 mm	8 ml	0,8 ml
3" – DN 80	119 mm	10 ml	1,0 ml
4" – DN 100	164 mm	35 ml	3,5 ml

Dixon Valve
 800 High Street
 Chestertown, MD 21620

ph: 877.963.4966
 fx: 800.283.4966

www.dixonvalve.com