




Air Receiver Manifold Assembly with Air King Couplers

Part #: 1217AR-4AK

Safely distributes compressed air to machines and tools.

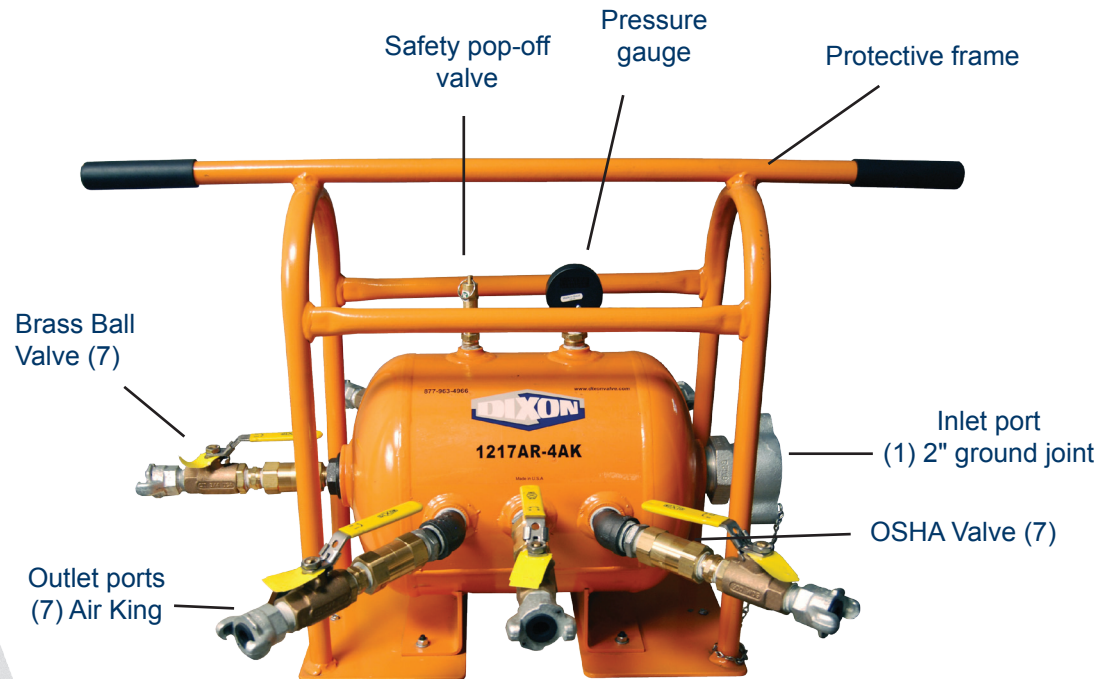

* Drain cock not shown

Service:

- 7 gallon capacity provides air reserve needed for operation of tools
- **200 PSI** maximum working pressure for tank (Working pressure of the system is limited to maximum working pressure of the components, i.e. 150 PSI for Air King)

Features:

- all tank outlets have female NPT threads
- portable - easy carry handles standard
- solid base with mounting holes standard
- approximate tank dimensions are 12" x 17"; 40" x 24" with frame
- painted safety orange

Components:

- spring-loaded safety shut-off valves (Cut-off Flow Rate 160-180 CFM at 90 PSI)
- safety pop-off valve (200 PSI) to protect against over-pressurizing of tank
- 0-300 PSI gauge
- locking handle ball valves
- drain valve provides for removal of accumulated oil and water

Codes and Standards:

- built to ASME Code, National Board registered
- conforms to OSHA Standards 1910.169 and 1926.306


* For additional information please see our 2011 Dixon Price List, pages 121 & 122
www.dixonvalve.com or contact our customer service at 1-877-963-4966.

ASME Air Tank with Fittings and Watts Filter

Designed to remove compressed air contaminants such as water, compressor oil, dirt, pipe scale and water particles from the air supply at the point of entry into the ASME air tank.

Part #: 1217AR-4AKWF

- includes basic 1217AR-4AK ASME manifold assembly
- F602-16WJR 2" auto drain filter with 26 ounce metal bowl and related plumbing installed on the inlet port of the ASME air tank
- Air supply hose connects directly to GM28 2" male spud on the filter air inlet.
- includes a B27SC wing nut cap with a chain

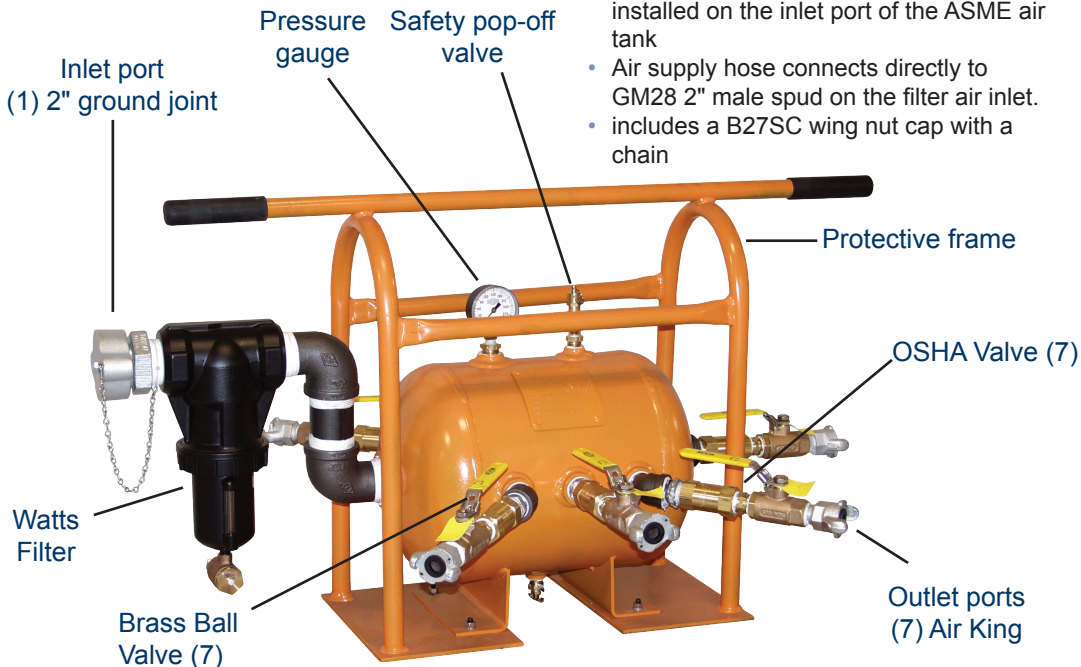

ASME Air Receiver Manifold Frame



Part #: 1217AR-4FR

Compressor Air Receiver:

- built to ASME Code, National Board registered
- 7 gallon capacity
- all openings are female NPT thread
- conforms to OSHA standards 1910.169 and 1926.306
- painted safety orange
- **200 PSI** working pressure

**Dixon recommends the use of safety clips and King safety cables on all air hose connections.*



Dixon Valve & Coupling Co.

800 High Street
Chestertown, MD 21620
877.963.4966
Fax: 800.283.4966
www.dixonvalve.com

Hose Coupling Safety

- Use Dixon couplings, retention devices and accessory products **only** for their intended service.
- All recommendations of the Hose Manufacturer, and the Coupling Manufacturer, must be employed with regards to **Size, Temperature, Application, Media, and Pressure** when selecting the components for a hose assembly.
- All finished hose assemblies should be tested in accordance with the Rubber Manufacturers Association recommendations.
- All hose assemblies should be thoroughly inspected prior to each use to insure they are undamaged, and properly coupled.
- Use safety clips on couplings, and King Safety Cables on assemblies where required by the manufacturer, as well as State and Federal regulations.
- Call Dixon (1-800-355-1991) for advice on couplings, retention devices, and accessories for your application.
- Under no circumstances should the assembly working pressure or working temperature exceed the working pressure or working temperature of the lowest rated component (coupling, clamp, ferrule, or hose).